

The e3WiFi Edition


Wall mounted

Models:

ASTG09KMCB/ASTG12KMCB/
ASTG18KMCB/ASTG22KMCB/
ASTG24KMCB/ASTG30KMTB/
ASTG34KMTB




New e3Series brings built-in wireless LAN, on a complete range of capacities

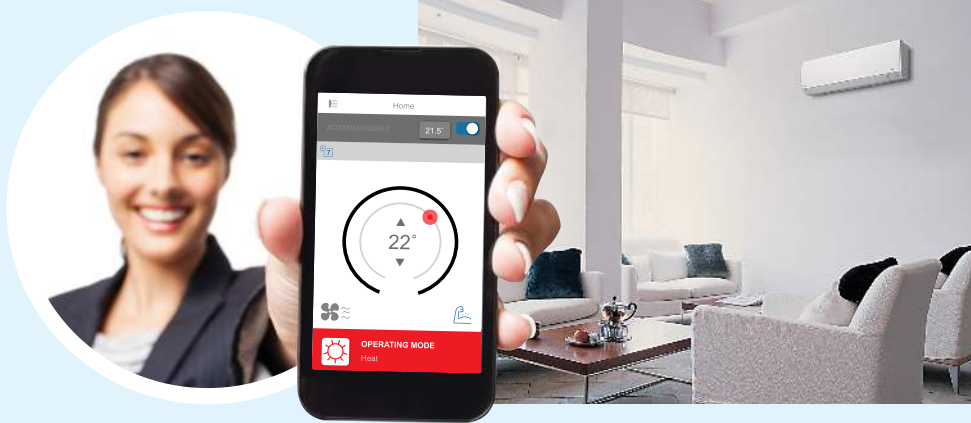

By using our built-in WLAN adaptor and FGLair app, your customer can control the temperature of their home anytime, anywhere!


User-friendly interface

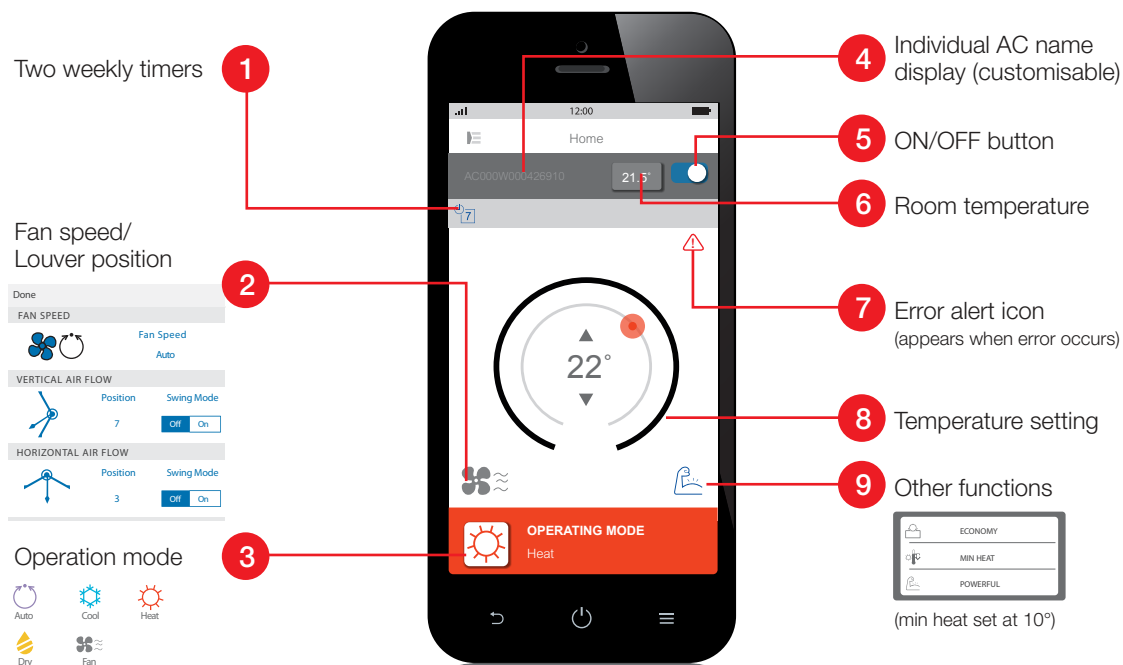

These new models in the **e3™** series now have a built-in wireless LAN interface, so you can control your Heat Pump from your smartphone or tablet.


WI-FI FEATURES

Easy to understand icons

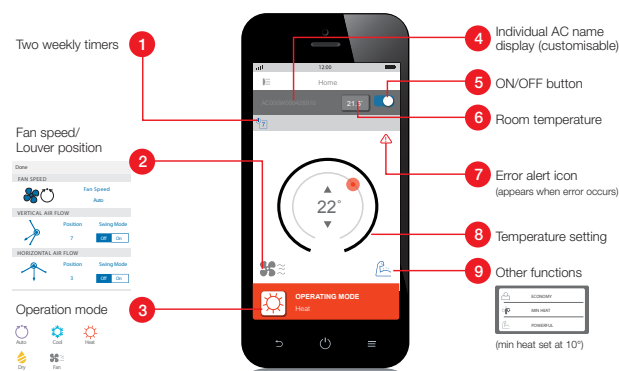

Easy operation anywhere by Smartphone or Tablet

One mobile device can control up to 24 indoor units remotely. Multiple devices can also control a single unit.

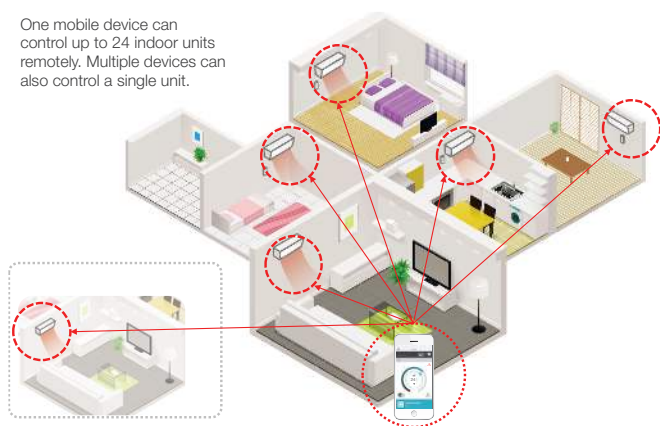

Email Operation

Notification settings	
Email Notifications	☒
SMS Notifications	☒


Weekly Timers

Control multiple models from one device or control one model from multiple devices.

Timers		Schedule	
Timer 1	☒	Setting	Power On
15:00 - Su,Mo,Tu,We,Th,Fr,Sa	Off	Start Time	15:08
Add Schedule	+	Operating Mode	
Timer 2	☒	Temperature	64°
Add Schedule	+	Days - Su,Mo,Tu,We,Th,Fr,Sa	
Done	Days	Cancel	Save
Select Days			
Sunday	☒		
Monday	☒		
Tuesday	☒		
Wednesday	☒		
Thursday	☒		
Friday	☒		


How it works

Built-in wireless LAN interface. By using the built-in LAN adaptor and the FGL Air App™, the Heat Pump system can be controlled from anywhere, anytime.

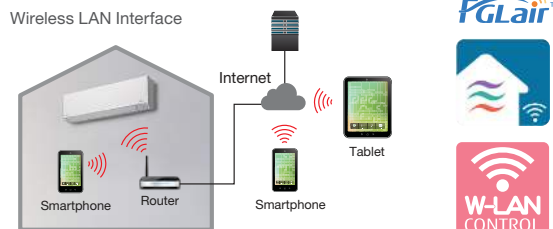

Powerful Mode

Delivers 20 minutes of continuous operation at maximum airflow and maximum compressor speed. This rapid cooling and heating makes the room comfortable faster.

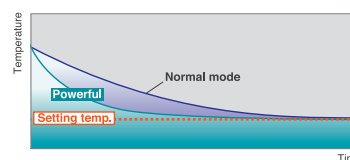


Optional wall controllers

LCD Wall controller



UTY-RVNYN

Universal wall controller



UTY-RNNYN

Simple wall controller



UTY-RSNNY

Touch screen controller*



UTY-RNRYZ1

The optional wall controllers require a communication kit.

Speak to your installer about your requirements

*Touch screen controller compatible with ASTG30 & 34KMTB

e3™ Wi-Fi Edition specifications

COMING SOON

Model No.	Indoor Unit		ASTG09KMCB	ASTG12KMCB	ASTG18KMCB	ASTG22KMCB	ASTG24KMCB	ASTG30KMTB	ASTG34KMTB
	Outdoor Unit		AOTG09KMCB	AOTG12KMCB	AOTG18KMCB	AOTG22KMCB	AOTG24KMCB	AOTG30KMTB	AOTG34KMTB
CAPACITY (RANGE)	HEAT	kW	3.2 (0.90 - 5.30)	3.7 (0.90 - 5.60)	6.0 (1.05 - 8.30)	7.20 (1.10 - 9.70)	8.0 (1.10 - 10.60)	9.0 (2.2 - 11.2)	10.3 (2.7 - 11.7)
	COOL	kW	2.5 (0.90 - 3.60)	3.5 (0.90 - 4.10)	5.0 (1.00 - 6.50)	6.0 (1.10 - 7.50)	7.10 (1.10 - 8.30)	8.5 (2.9 - 10.5)	9.4 (2.9 - 11.2)
INPUT POWER	HEAT/COOL	kW	0.65 / 0.51	0.81 / 0.86	1.42 / 1.22	1.77 / 1.59	2.12 / 2.01	2.34 / 2.46	2.84 / 2.78
COP / EER	HEAT/COOL	kW/kW	4.92 / 4.90	4.57 / 4.07	4.23 / 4.10	4.07 / 3.77	3.77 / 3.53	3.84 / 3.45	3.63 / 3.38
STAR RATING	HEAT		5.0	4.5	3.5	3.5	3.0	3.0	2.5
	COOL		5.0	3.5	3.5	3.0	2.5	2.0	2.0
RUN CURRENT	HEAT/COOL	A	3.3 / 2.7	4.0 / 4.2	6.0 / 5.2	7.5 / 6.7	9.0 / 8.5	10.1 / 10.4	12.9 / 11.7
MOISTURE REMOVAL		L/Hr	1.3	1.8	2.6	2.7	2.7	2.5	3.5
INDOOR NOISE Q/L/M/H	HEAT	dB(A)	22/31/34/40	22/32/37/42	29/35/40/46	32/37/42/48	32/37/42/49	33/39/44/51	33/38/44/51
OUTDOOR NOISE			47	49	48	52	52	54	
AIR CIRCULATION	INDOOR	l/s	194	200	258	278	311	389	
DIMENSIONS AND WEIGHTS (HxWxD)	INDOOR	mm	268 x 840 x 203		295 x 940 x 270			340 x 1150 x 280	
		kg	8.5		14			18	
	OUTDOOR	mm	540 x 790 x 290		620 x 790 x 290			830 x 900 x 330	914 x 970 x 370
		kg	34		40			61	75
OUTDOOR OPERATING TEMPERATURE	HEAT	Degree	-15 to 24						
	COOL		10 to 46		-10 to 46				
REFRIGERANT			R32						

Please refer to specifications before installation and servicing this product. Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so. The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products. Suitable access for warranty and service is required. Future improvement, specifications, designs of product and availability are subject to change without notice. All Capacity and Energy Efficiency ratings are based on AS/NZS3823.2. Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colours may be different from the colours shown in this printed material.
- Installing Wi-Fi functionality requires the presence of an existing wi-fi internet connection and router in the customers home.
- To operate the FGLair app to control your unit remotely, your customer requires an internet connection on their mobile device.

©2017 Fujitsu General New Zealand. All rights reserved.

FUJITSU

Fujitsu General New Zealand

www.fujitsugeneral.co.nz

email: contact@fujitsugeneral.co.nz